

One surface - many uses. Any color.


Think of your walls as a blank canvas that can go as far as the imagination can take them. With **Cinch Magnetic Wallcovering and Scribil Dry-Erase Covering** by Vitrulan, we've combined form and function, allowing you to turn your walls into a writing and magnetic work area. Your walls are transformed into the perfect idea space – display whatever comes to mind.

CINCH

Vitrulan wallcoverings are made of 100% woven glass fabric, which provides superior strength and durability. CINCH Magnetic Wallcovering has a metallic coating that allows magnets to be directly applied to the wall – no need for separate cork or magnetic boards. The product, which comes in textured or smooth options, is installed similar to traditional wallcovering – over any substrate. Then paint it any color, as well as adding a dry-erase coating, creating a virtually seamless high performance work surface. The result is a hard-working action wall that's clean, stylish and functional.

SCRIBIL

Got something on your mind? Then write it on your walls. With Scribil Dry-Erase Coating from Vitrulan, you can turn your walls into an idea board. Scribil goes on easily with a roller – just like regular paint. And its clear finish eliminates the limitations of traditional whiteboards, allowing any color to show through on your wall. For superior style and function, Scribil can go on over any surface including Vitrulan wallcoverings and Vitrulan Cinch Magnetic Wallcovering. The result is a professional-grade, dry-erase surface that's simple to write on and erase.

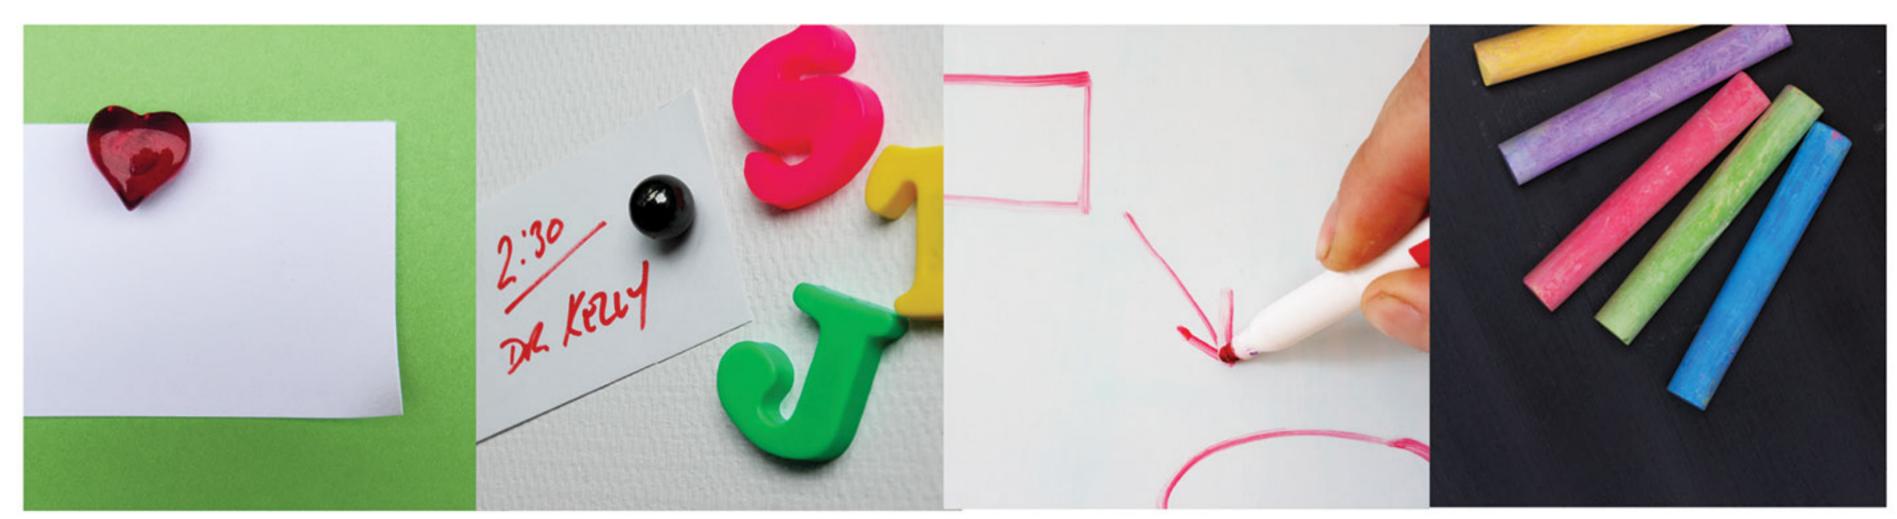

Paint it any color.

Magnetic walls.

Dry-Erase walls.

Blackboard walls.

FEATURES & BENEFITS

SCRIBIL DRY-ERASE COATING.

- Clear, high-gloss coating creates a high-performance, write-and-erase finish when applied to any paintable surface.
- Whatever color your walls are will show through the Scribil coating, allowing for unlimited design options. Even make your wall a chalkboard.
- Fast drying, low VOC, water-based formula covers in ONE coat without need for primer.
- Any standard, any color, dry-erase marker can be used. For best performance, use Expo® Bold or Low Odor dry erase markers.
- For daily erasing and cleaning use a clean, dry-erase cotton cloth, or microfiber towel.
- Periodically use a clean damp cloth, dry-erase cleaner, or wipes to maintain surface.
- More writing surface with far less environmental impact than whiteboards.
- 5-year limited warranty from date of shipment.

SCRIBIL KIT CONTENTS

Part A: low odor, milky white, non-pigmented liquid emulsion Part B: pale yellow polymer hardener with slight odor Finisher: Scribil Surface Conditioner

CINCH MAGNETIC WALLCOVERING

- Walls become magnetic presentation and active areas, with option for dry-erase surface
- Available in smooth and textured option
- Can be painted any color up to six times, without affecting magnetic properties
- Can be applied to any substrate, even cracked or uneven walls
- Highly resistant to wear and tear
- Offers unparalleled hygiene qualities and environmental benefits
- Virtually seamless surface means dirt and micro-organisms will not accumulate in pores and pockets
- Comes in 37.4" wide rolls that can be cut to any size
- Availability allows for quick delivery

APPLICATIONS

EDUCATION

Nurseries and pre-schools • K-12 schools • Colleges • Universities • Admissions offices • Cafeterias • Student centers • Coaches offices • Locker rooms • Dormatories

HEALTHCARE

Hospitals • Doctor's offices • Nursing stations • Waiting rooms • Clinics • Rehabilitation rooms • Retirement rec rooms

CORPORATE

Conference rooms • Break-out rooms • Creative studios • Ad agencies • Architectural firms • Reception areas • Public area info stations

SCRIBIL PRODUCT SPECIFICATIONS

The state of the s		
Color / Gloss	Clear / 92 at 60°	
Mixing Ratio	2.5 :1 by volume	
Pot Life (mixed)	1 hour depending on ambient temperature	
Spread Rate	40 ft² small kit / 80 ft² medium kit / 180 ft² large kit	
Scrub Resistance	> 10,000 cycles – excellent stain removal	
Vapor Density	<1	
Fire Rating	Class A / Class 1 – ASTM E-84; classified as insignificant flammability hazard	
VOC Content	< 50 g/L	
Pot/Shelf Life	One hour open time / six (6) month shelf life - unopened	
Drying Time/Usable	To touch in ½ hour / 5 days	

The above information is based on our current knowledge about the product referenced and has been published to the best of our knowledge. We point out to the user that possible risks can arise when the product is used for other than intended applications.

CINCH PRODUCT SPECIFICATIONS

PER ROLL	SMOOTH M-22	TEXTURED M-239
Length	17.1 l/f or 34 l/f	17.1 l/f or 34 l/f
Width	37.4 inches	37.4 inches
Coverage	53 ft² or 106 ft²	53 ft ² or 106 ft ²
Weight	42.8 oz./yd²	42.8 oz./yd²
Spread Rate - Adhesive	250 ft² / gal.	250 ft² / gal.

Sold in full bolts







TEXTURED M-239

