


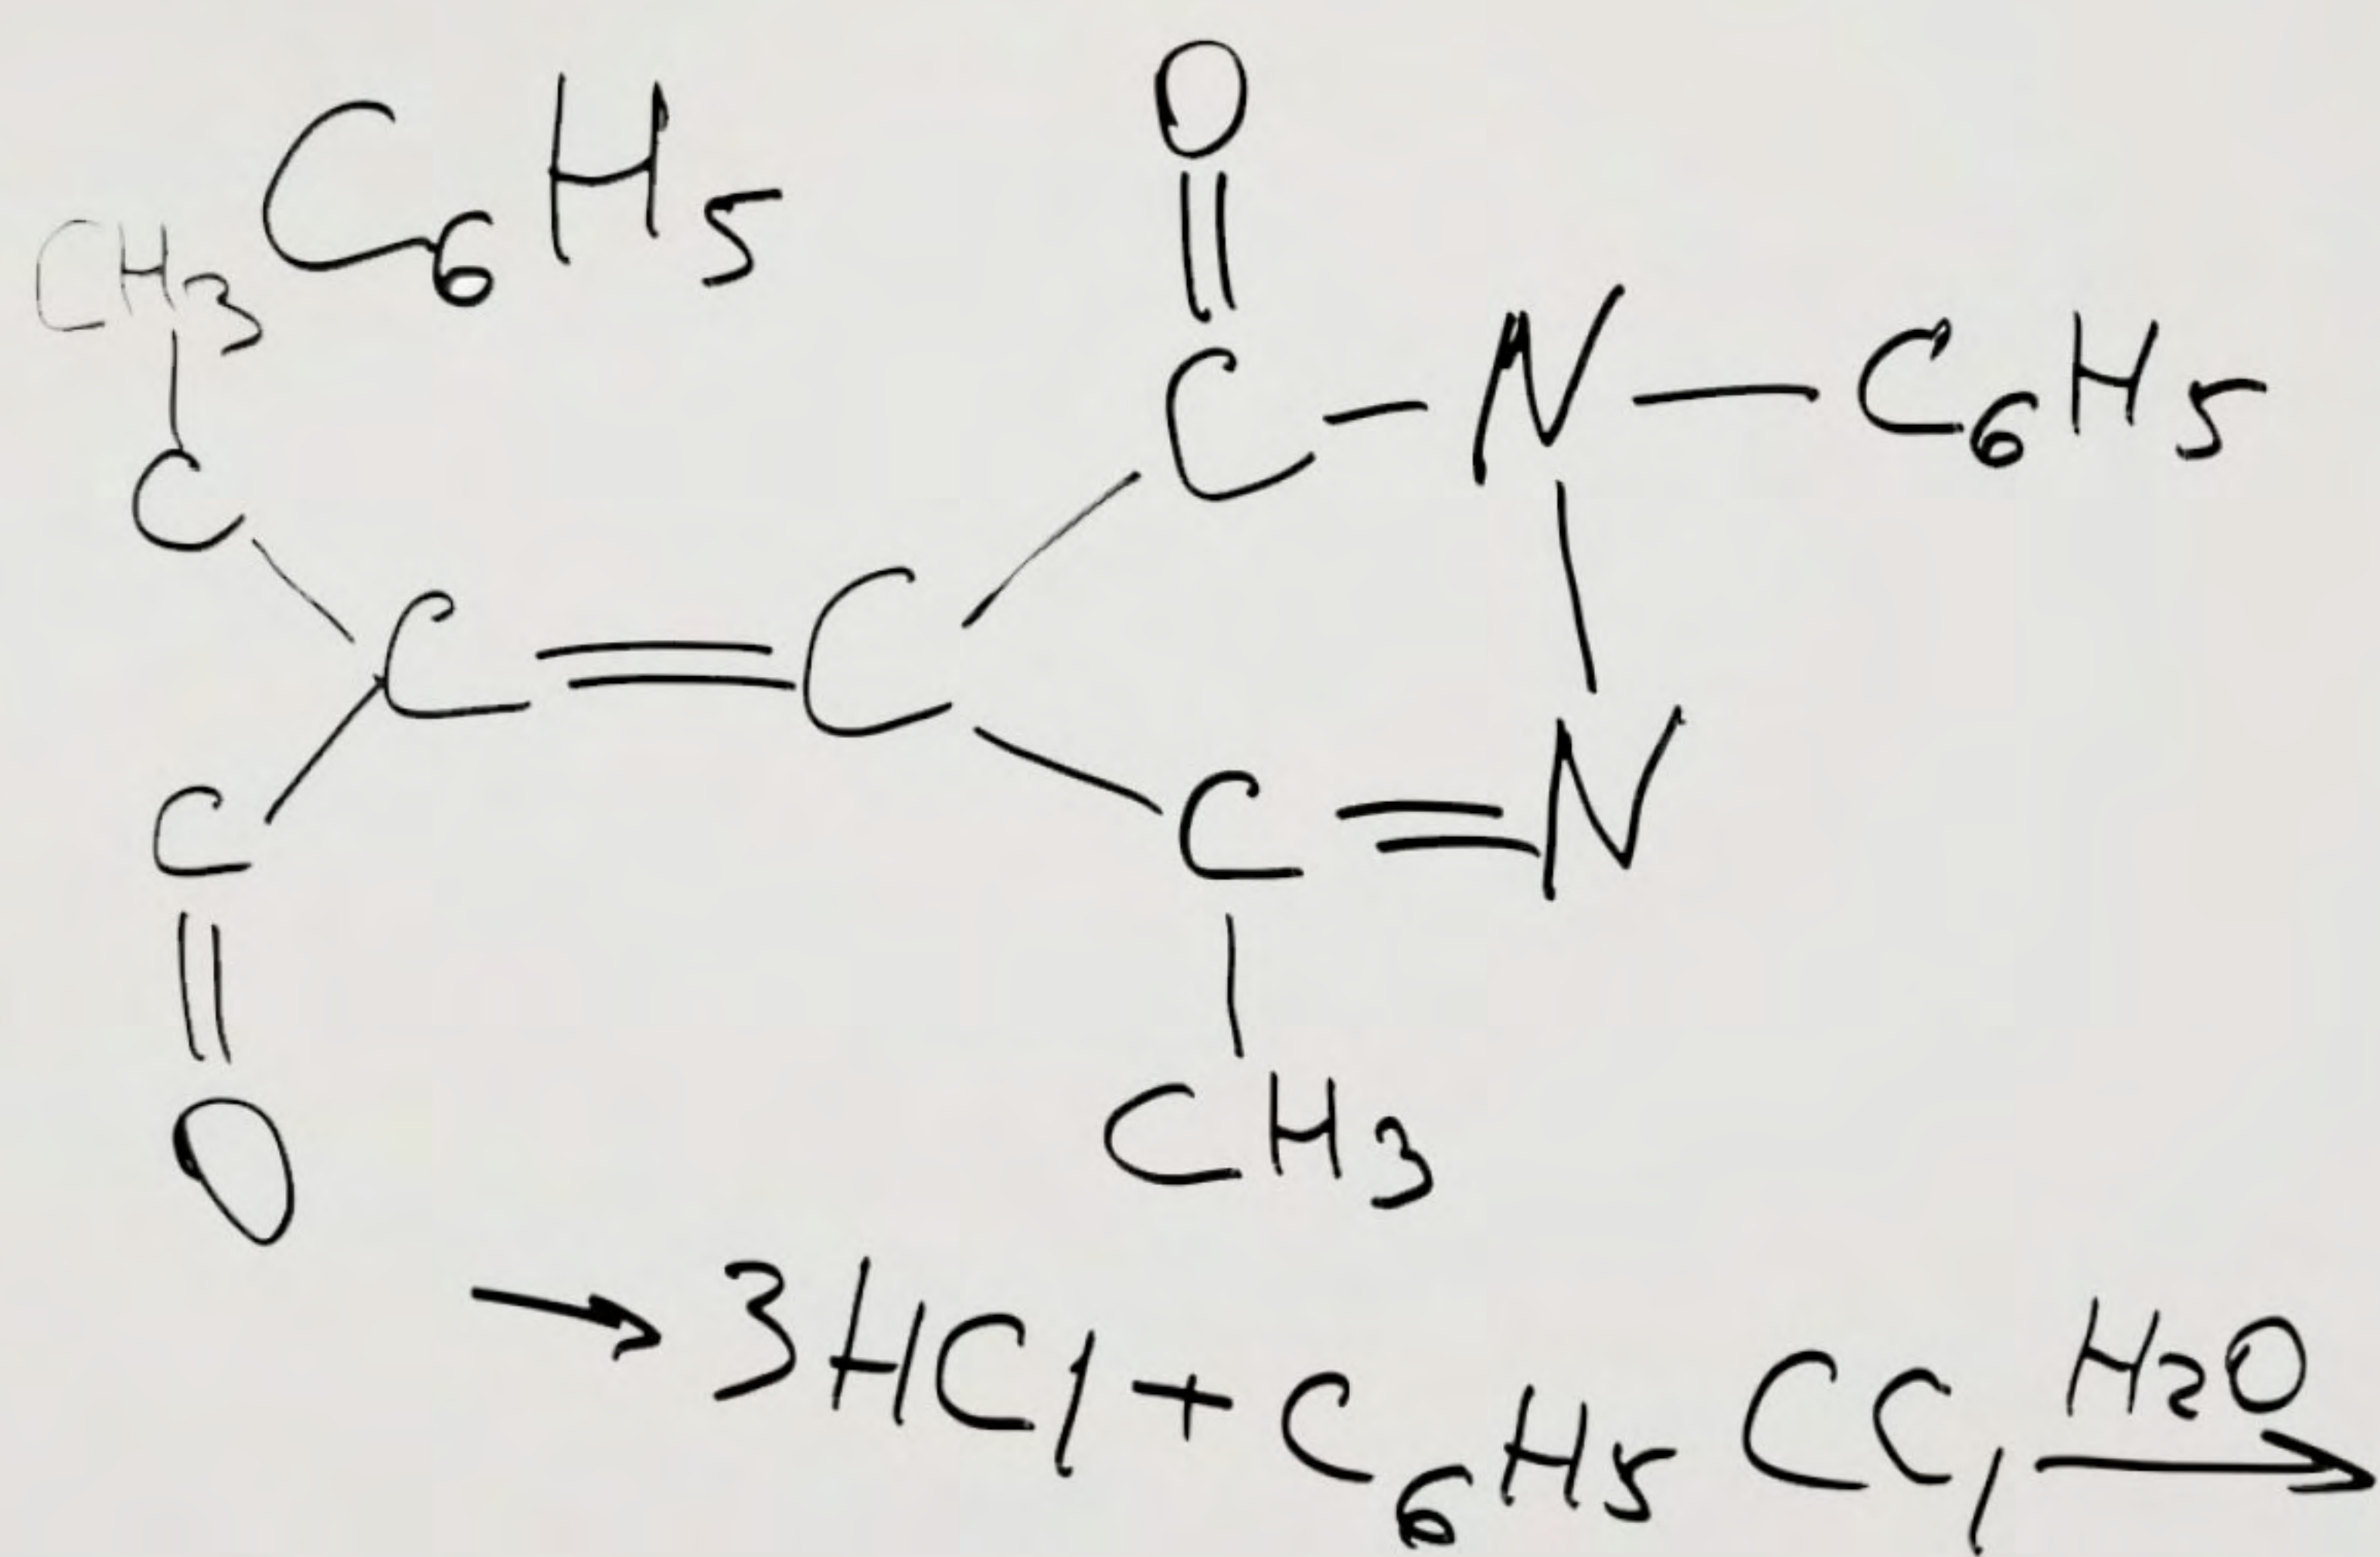


Write On Your Walls.

Scribil Dry Erase Wall Coating

USE WITH CINCH MAGNETIC WALL SYSTEM


Keep your ideas rolling - on the walls around you, whatever the hue.

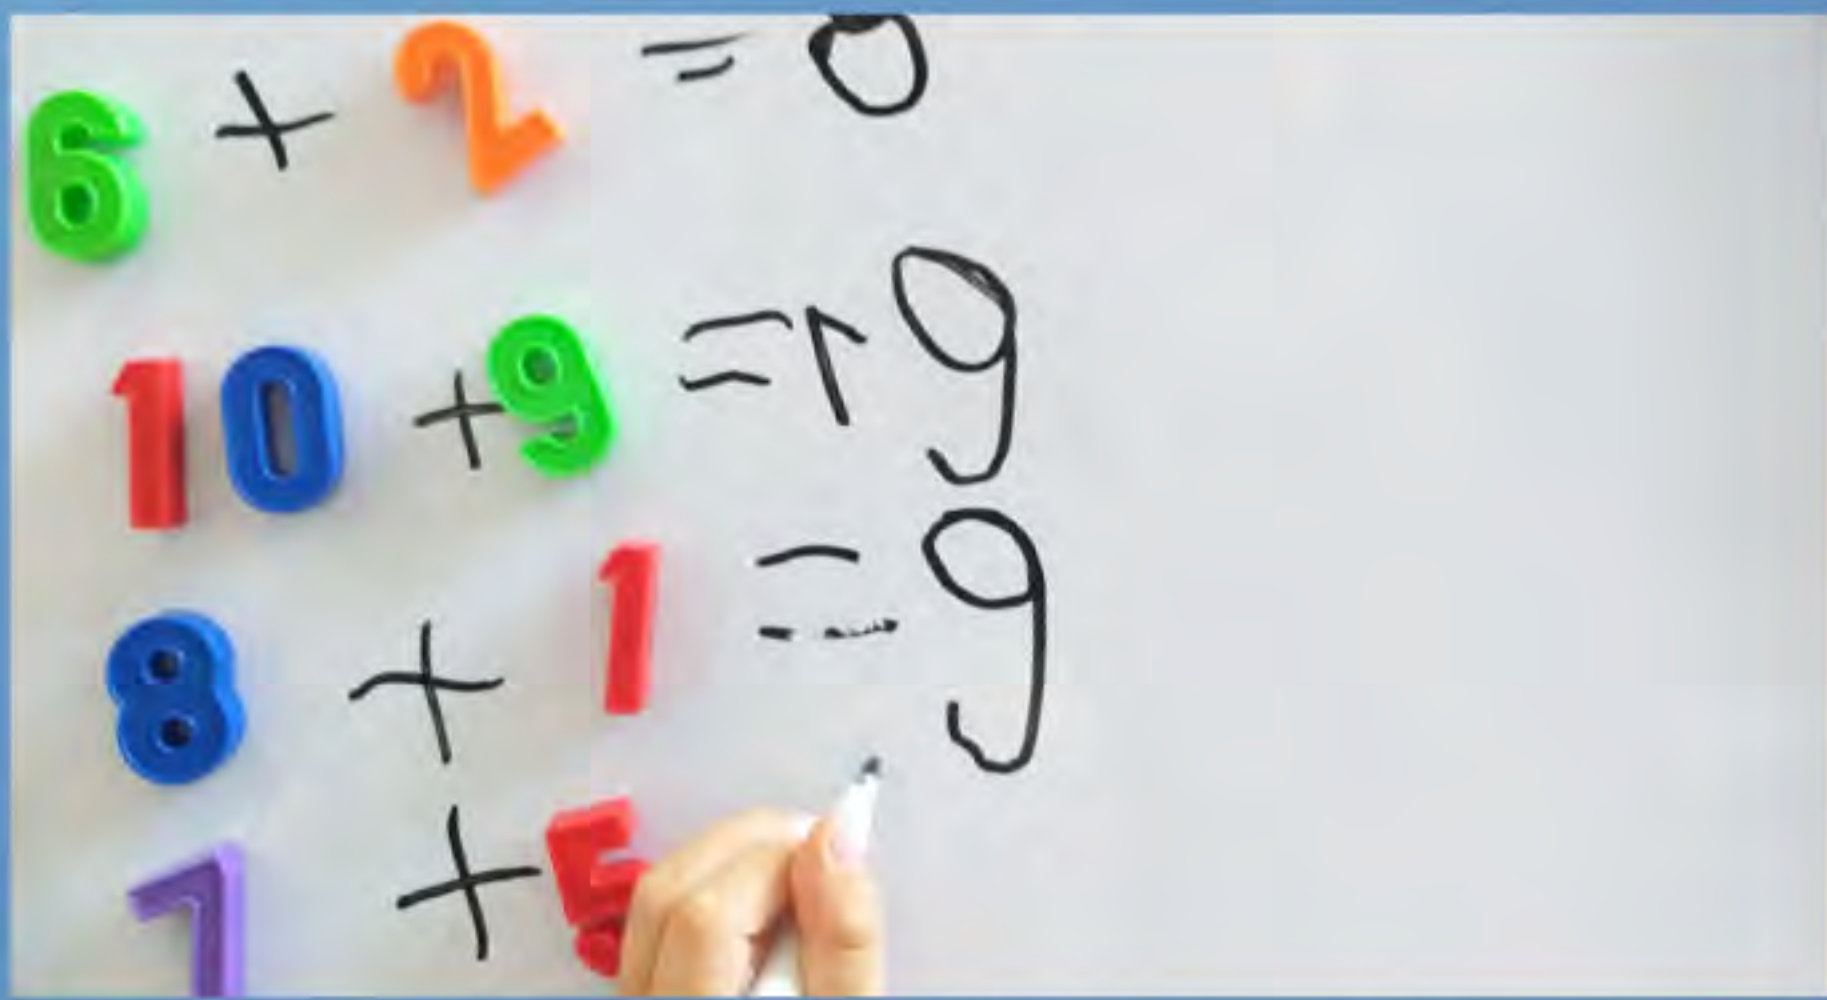

Magnetize with our Cinch Wallcovering



Endless scenarios and applications

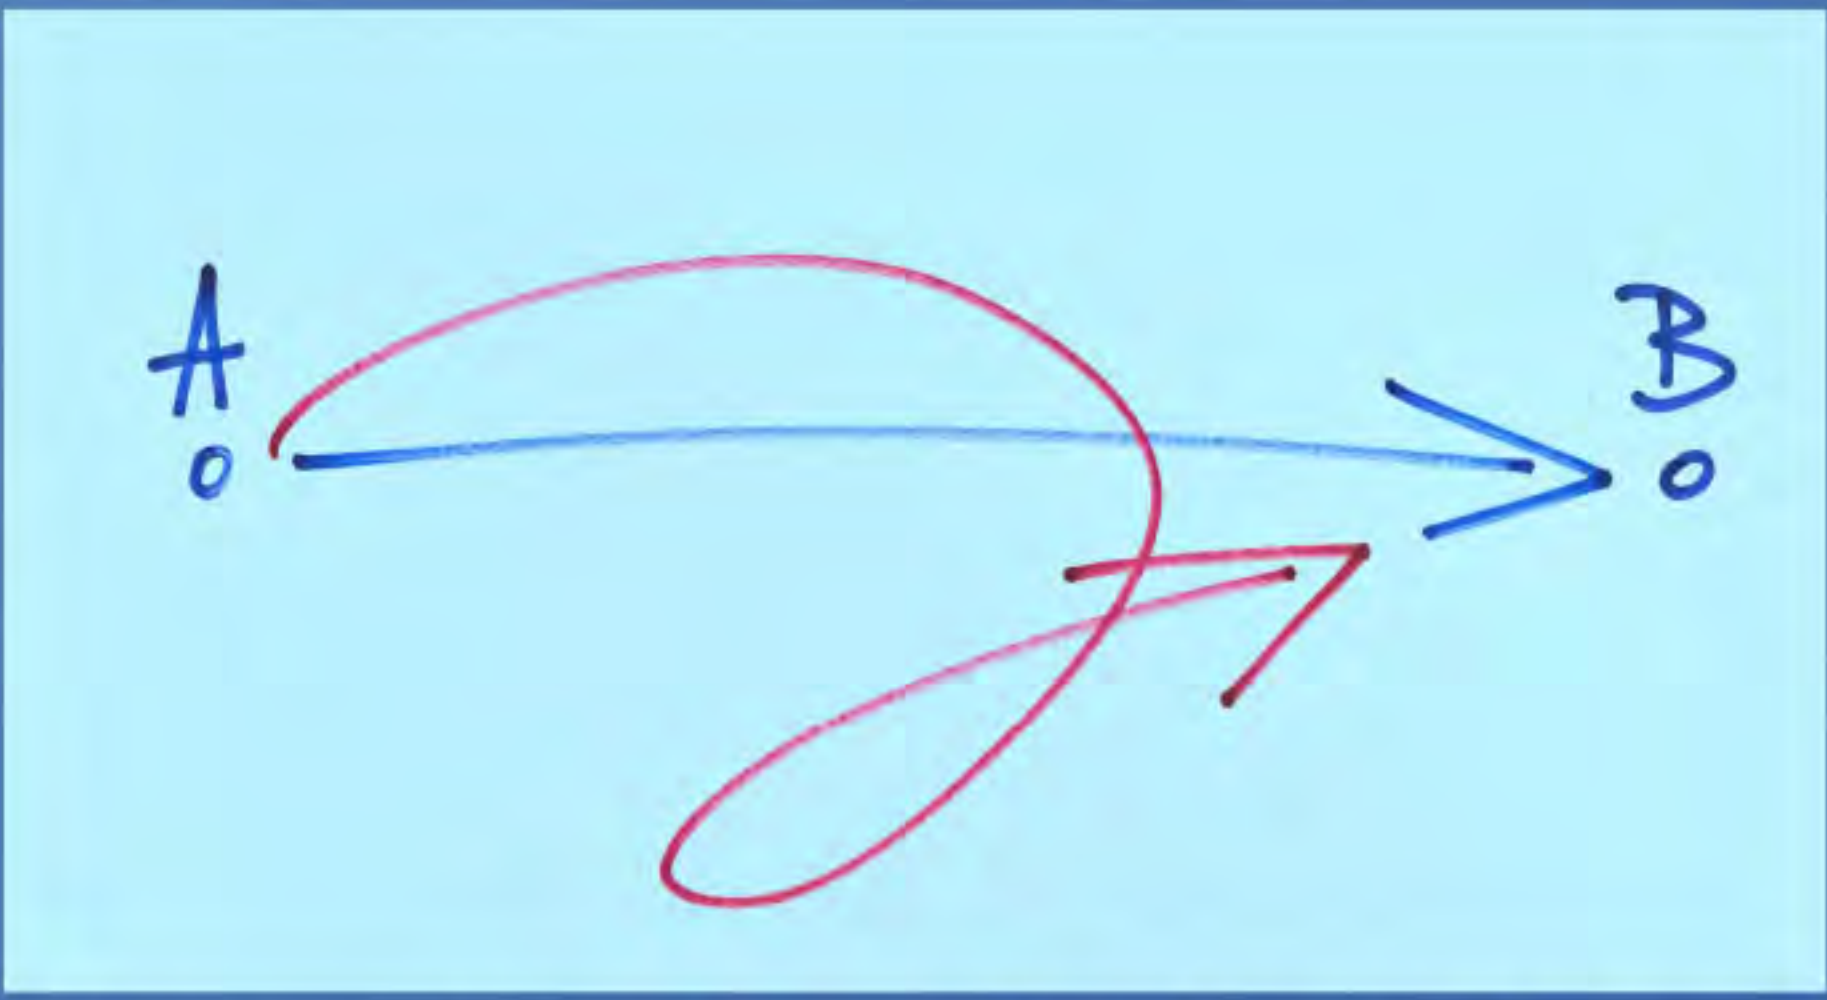

Keep meeting rooms comfortable and quiet

Got something on your mind? Then write it on your walls. With **Scribil Dry-Erase Coating** from Vitrulan, you can turn your walls into an idea board. **Scribil** goes on easily with a roller – just like paint. It’s clear finish eliminates the limitations of traditional whiteboards, allowing any color to show through on your wall. For superior style and function, **Scribil** can go on over any surface including Vitrulan Wallcoverings and **Vitrulan Cinch Magnetic Wallcovering**. The result is a professional-grade, dry-erase surface that’s simple to write on and erase.

FEATURES & BENEFITS

- Clear, high-gloss coating creates a high-performance, write-and-erase finish when applied to any paintable surface.
- Whatever color your walls are will show through the Scribil coating, allowing for unlimited design options.
- Fast drying, water-based formula covers in ONE coat without need for primer.
- Any standard dry erase marker, in any color, can be used. For best performance, use Expo® Bold or Low Odor dry erase markers.
- For daily erasing and cleaning use a clean, dry-erase cotton cloth, or microfiber towel.
- Periodically use a clean damp cloth, dry-erase cleaner, or wipes to maintain surface.
- More writing surface with far less environmental impact than whiteboards.
- 5-year limited warranty from date of shipment.
- Kit Contents:
 - Part A: low odor, milky white, non-pigmented liquid emulsion
 - Part B: pale yellow polymer hardener with slight odor

SCRIBIL PRODUCT SPECIFICATIONS

Color / Gloss	Clear / 92 at 60°
Mixing Ratio	2.5 :1 by volume
Pot Life (mixed)	1 hour depending on ambient temperature
Spread Rate	360 ft² per kit
Scrub Resistance	> 10,000 cycles – excellent stain removal
Vapor Density	<1
Fire Rating	Class A / Class 1 – ASTM E-84; classified as insignificant flammability hazard
VOC Content	< 50 g/L
Pot/Shelf Life	90 minutes (1.5 hr) open time / six (6) month shelf life - unopened
Drying Time/Usable	To touch in ½ hour / 5 days

The above information is based on our current knowledge about the product referenced and has been published to the best of our knowledge. We point out to the user that possible risks can arise when the product is used for other than intended applications.

APPLICATIONS

- Education
- Nurseries and pre-schools
 - K-12 schools
 - Colleges and universities
 - Admissions offices
 - Cafeterias
 - Coaches’ offices/locker rooms
- Healthcare
- Hospitals
 - Doctors’ offices
 - Nursing stations
 - Waiting rooms
- Corporate
- Creative offices/ad agencies
 - Architect firms
 - Conference rooms
 - Reception areas

